




Grand®

Large Diameter Revolving Doors

Turn an ordinary entrance into an energy-efficient vestibule system. Spacious compartments provide an elegant entrance up to 16 ft. overall diameter to manage high volume traffic needs including wheel chairs, walkers and even hospital stretchers.

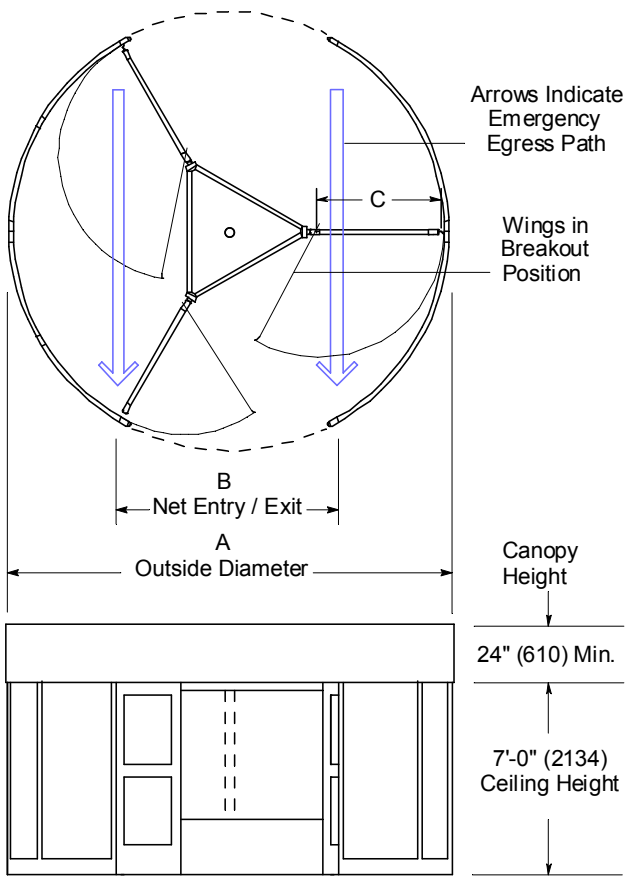

- ### Options
- Round or Segmented® drum enclosure
 - Custom ceiling height up to 8'-0".
 - Extended or cropped canopy.
 - Aluminum roof.
 - Custom anodized or paint finish.

- ### Installation and Operation
- Door unit is surface mounted to finish floor. Unit is free-standing with no additional support required.
 - Drum can be center connected to adjacent construction or throat connected (at entry vertical rails).
 - Motion sensors at each entry starts wing rotation on user approach at 3-5 RPM. Pushbuttons mounted at each side of entry slow door to 1-3 RPM for slower traffic.
 - Electrical: Provide 120 VAC, 15 amp service on a dedicated 20 amp circuit breaker routed to power operator mounted within the enclosure canopy.

Outside Dia "A"	Entry "B"	Clear Access Dim "C"
12'-0" (3658)	5'-3 3/4" (1619)	3'-1 1/8" (943)
14'-0" (4267)	6'-3 3/4" (1924)	4'-1 1/8" (1247)
16'-0" (4877)	7'-3 3/4" (2229)	5'-1 1/8" (1552)



4242 Baldwin Blvd.
Corpus Christi, Texas
78405-3399

Tel 800-531-3111
Fax 361-888-6510

www.Hortondoors.com